


WINGED MAXIMUM SLAT®

When you need increased privacy, our Winged Slat® is the answer. With the proven quality and durability of our standard slats plus unique "wings" for extra screening and security. Maximum also uses our patented bottom-locking system for fast and easy installation.

- ✧ **UNIQUE PATENTED DESIGN:** Includes a rigid, flat-tubular body. Flexible and resilient wing portions are positioned on each side of the slat body.
- ✧ **STANDARD HEIGHTS:** 4, 5, 6 feet. For heights exceeding 7 feet, we recommend using (2) two half sizes (i.e. for 10 ft. fence use two 5 ft. slats) this will help during installation and will not lessen privacy.
- ✧ **WIND LOAD AND PRIVACY FACTOR:** Approximately 90%. (Based on wire/mesh used—stretch tension)
- ✧ **SLAT LENGTH:** 2" shorter than overall height of fence.
- ✧ **NOTE:** Additional time should be allowed for installation.

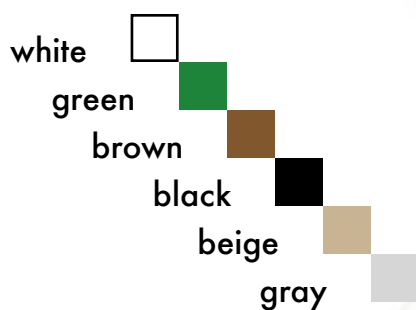

SPECIAL ORDER COLORS



* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



PHOENIX FENCE

EDMONTON

12816-156 STREET T5V 1E9

PHONE: (780) 447-1919

FAX: (780) 447-2512

TOLL FREE: 1-800-661-9847

E-MAIL: phoenix@phoenixfence.ca

CALGARY

6204-2nd STREET S.E. T2H 1J4

PHONE: (403) 259-5155

FAX: (403) 259-2262

TOLL FREE: 1-888-220-2525

E-MAIL: calgary@phoenixfence.ca

WEBSITE: www.phoenixfence.ca

Covered by one or more of the following patents:
US Patent 5,184,801 / 5,687,957

Manufactured by



FENCE PRODUCTS SPECIFICATIONS

WINGED SLAT SIZE SPECS

SLAT TYPE	SLAT WIDTH	MESH SIZE	WIRE GAUGE	SLATS PER BAG	APPROX. COVERAGE PER BAG
WINGED SLAT	1 1/4"	2"	9" ONLY	82	10 LINEAR FEET

MATERIALS

The Winged Slat is extruded from High Density Polyethylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

- Winged Slats include Ethyl Vinyl Acetate (EVA), a softer plastic to keep the wings flexible and resilient.

DURABILITY

PDS® HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WINDLOAD DISCLAIMER

Bunzl will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

LIMITED WARRANTY


Winged Slat carries a 25-year, pro-rata warranty against breakage under normal conditions. Write Bunzl Extrusion for full warranty information.

HDPE TECHNICAL PROPERTIES

Property	Value
Melt Index	(.6) A low melt index indicates improved stress and crack resistance.
Density	(.957) Polyethylene ranges anywhere from .914 to .960 in density. A higher density yields maximum stiffness without becoming overly brittle.
Minimum Temp.	(-76° F) Polyethylene stays flexible even at this temperature extreme.
Maximum Temp.	(250° F) Polyethylene does not distort until reaching this temperature.
Tensile Strength	(3,700 psi) Material will not suffer distortion at lesser loads or impacts.


INSTALLATION INSTRUCTIONS

Step 1




Insert rail horizontally in first full diamond at bottom of fence with open side facing up.

Step 2



Insert vertical slats with interlocking tab downward. Slat engages and interlocks with bottom rail.

Complete

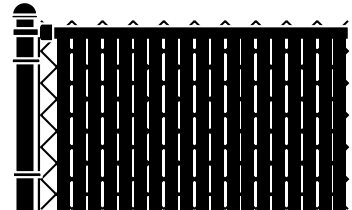

Enjoy a beautiful fence that was simple to install.

Contact your local fence professional for more information about our complete line of enhancement products.

