


# TOPLOCK



The Top-Lock Slat provides an economical and attractive way to enhance any chain link fence. Filtrona Extrusion is the largest manufacturer of Top-Lock Slats, which are marketed under the PDS® brand name. With over 25 years of experience extruding these products and an exclusive, patented, locking design, you are assured of the highest standards in quality - from the raw materials used in manufacturing to the finished product in your fence. This design utilizes a top-locking mechanism located *near* the top of the slats to ensure a clean, straight edge, further enhancing its appearance.

-  **DESIGN:** Top-Locking Slats are flat and tubular in shape, with circular, notched-out holes located near the top of the slat.
-  **STANDARD HEIGHTS:** 4, 5 and 6 feet.
-  **SPECIAL ORDER HEIGHTS:** 7, 8, 10 and 12 feet.
-  **SLAT LENGTH:** 2" shorter than the overall height of fence.
-  **FLEXIBLE, TOP-LOCKING CHANNEL:** Also available in a continuous 200 foot reel for larger jobs.
-  **WIND LOAD & PRIVACY FACTOR:** Approximately 75%.

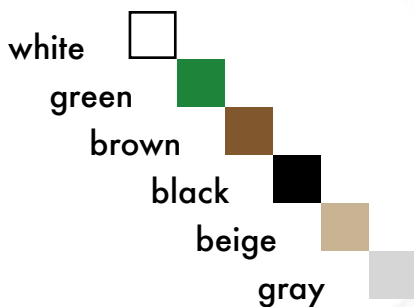

## SPECIAL ORDER COLORS



\* Exact representation of slat colors in printing is difficult. Please refer to actual color samples for final matching.



## PHOENIX FENCE

### EDMONTON

12816-156 STREET T5V 1E9

PHONE: (780) 447-1919

FAX: (780) 447-2512

TOLL FREE: 1-800-661-9847

E-MAIL: phoenix@phoenixfence.ca

### CALGARY

6204-2nd STREET S.E. T2H 1J4

PHONE: (403) 259-5155

FAX: (403) 259-2262

TOLL FREE: 1-888-220-2525

E-MAIL: calgary@phoenixfence.ca

WEBSITE: [www.phoenixfence.ca](http://www.phoenixfence.ca)

Manufactured by



# FENCE PRODUCTS SPECIFICATIONS

## MATERIALS

The Top Lock product is extruded from High Density Polyethylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to retard the harmful effects of the sun and lengthen the life of the product.

## DURABILITY

PDS® HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

## MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

## WINDLOAD DISCLAIMER

Filtrona will not be responsible for damage due to wind load conditions resulting from insufficient structural support.

## LIMITED WARRANTY

Top Lock carries a 25-year, pro-rata warranty against breakage under normal conditions. Write Filtrona Extrusion for full warranty information.


Manufactured by  FILTRONA EXTRUSION

## HDPE TECHNICAL PROPERTIES

Property	Value
Melt Index	(.6) A low melt index indicates improved stress and crack resistance.
Density	(.957) Polyethylene ranges anywhere from .914 to .960 in density. A higher density yields maximum stiffness without becoming overly brittle.
Minimum Temp.	(-76° F) Polyethylene stays flexible even at this temperature extreme.
Maximum Temp.	(250° F) Polyethylene does not distort until reaching this temperature.
Tensile Strength	(3,700 psi) Material will not suffer distortion at lesser loads or impacts.


## INSTALLATION INSTRUCTIONS

### Step 1



There is no need to kneel down! Simply insert the slats vertically from top to bottom, *keeping the locking holes on top.*

### Step 2

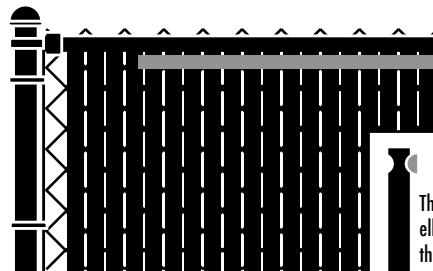

Thread the flexible locking channel horizontally through the notched holes in the slats.

These holes are elliptical to ensure they always stay open for fast and easy threading.

Contact your local fence professional for more information about our complete line of enhancement products.

