




Commercial Hot Dip Galvanized Pipe

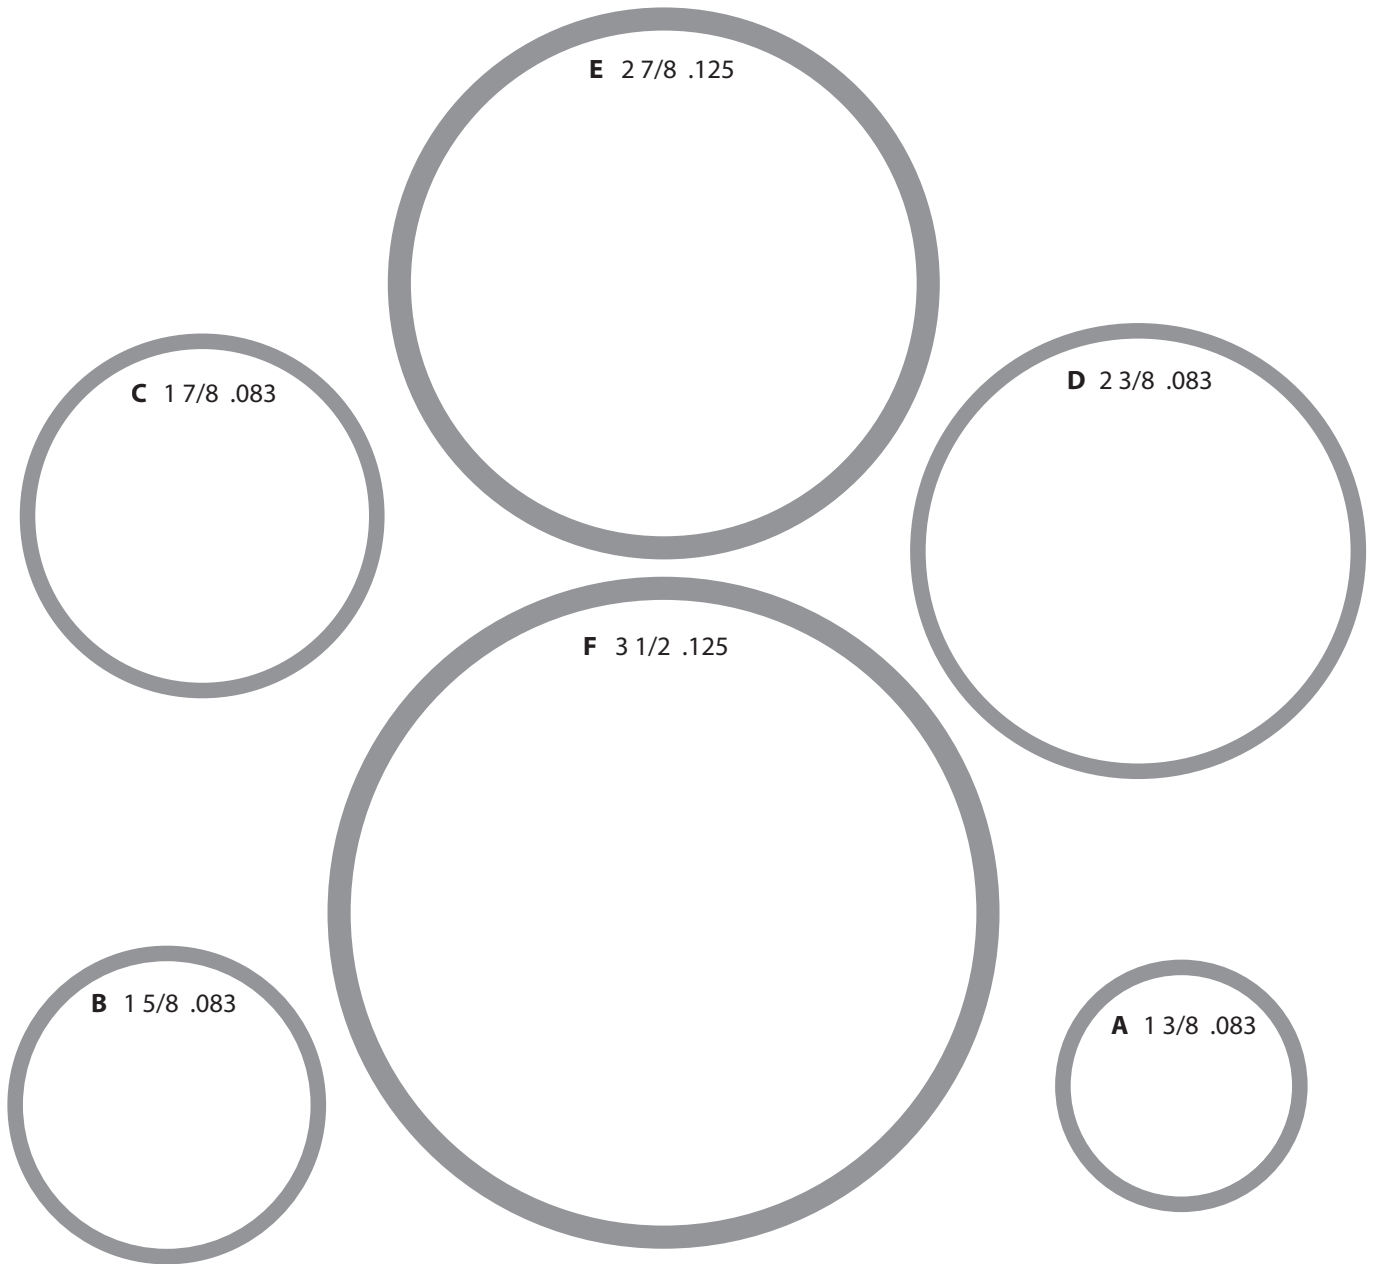


	Pipe Size	Wall Thickness (in.)	Outside Diameter (in.)	Inside Diameter (in.)	Weight (lbs/ft)
A	1 3/8 .083	0.079 - 0.083	1.315	1.149 - 1.157	1.043
B	1 5/8 .083	0.079 - 0.083	1.660	1.494 - 1.502	1.334
C	1 7/8 .083	0.079 - 0.083	1.900	1.734 - 1.742	1.536
D	2 3/8 .083	0.079 - 0.083	2.375	2.209 - 2.217	1.940
E	2 7/8 .125	0.116 - 0.125	2.875	2.625 - 2.643	3.560
F	3 1/2 .125	0.116 - 0.125	3.500	3.250 - 3.268	4.330

(Specification: British Standard 1387:1985)
Note: Information is approximate



Schedule 40 Hot Dip Galvanized Pipe

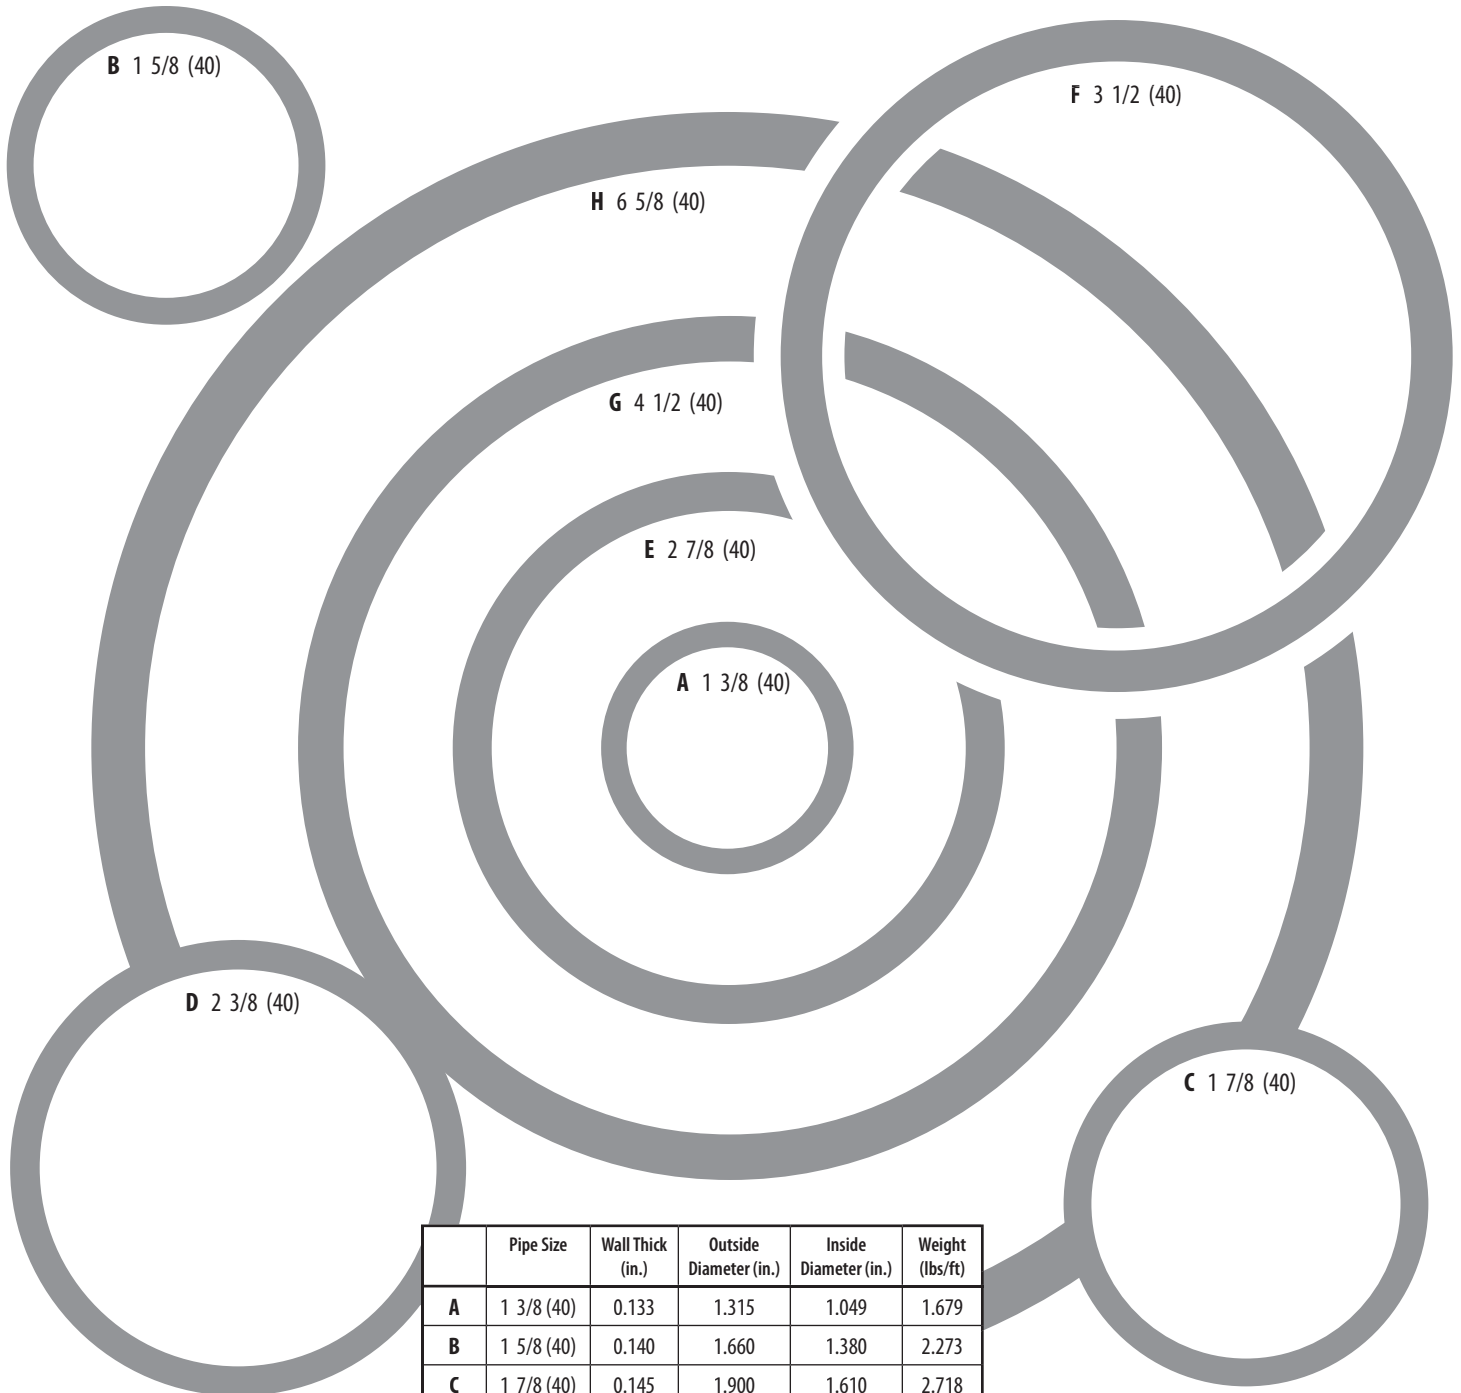


	Pipe Size	Wall Thick (in.)	Outside Diameter (in.)	Inside Diameter (in.)	Weight (lbs/ft)
A	1 3/8 (40)	0.133	1.315	1.049	1.679
B	1 5/8 (40)	0.140	1.660	1.380	2.273
C	1 7/8 (40)	0.145	1.900	1.610	2.718
D	2 3/8 (40)	0.154	2.375	2.067	3.653
E	2 7/8 (40)	0.203	2.875	2.469	5.793
F	3 1/2 (40)	0.216	3.500	3.068	7.576
G	4 1/2 (40)	0.237	4.500	4.026	10.790
H	6 5/8 (40)	0.280	6.625	6.065	18.974

(Specification: ASTM A3 Grade A)
Note: Information is approximate



Residential Coloured Coated Tubing

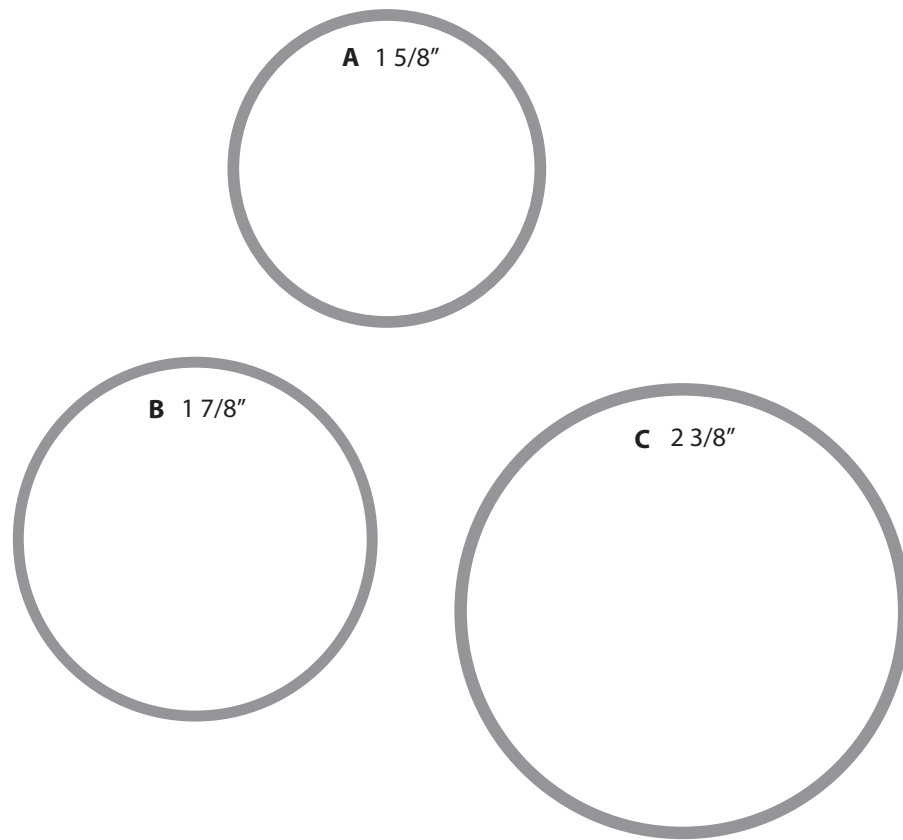

	Tube Size	Wall Thickness (in.)	Outside Diameter (in.)	Inside Diameter (in.)	Weight (lbs/ft)
A	1 5/8"	0.057	1.660	1.546	0.980
	1 5/8"	0.065	1.660	1.530	1.110
B	1 7/8"	0.057	1.900	1.786	1.120
	1 7/8"	0.065	1.900	1.770	1.270
C	2 3/8"	0.057	2.375	2.261	1.410
	2 3/8"	0.065	2.375	2.245	1600
	2 3/8"	0.074	2.375	2.227	1.820

(Specification: ASTM A-500 Grade A/B)
Note: Information is approximate